


Log Cabin Twist Quilt Block

Assemble a 9" Log Cabin Twist block.

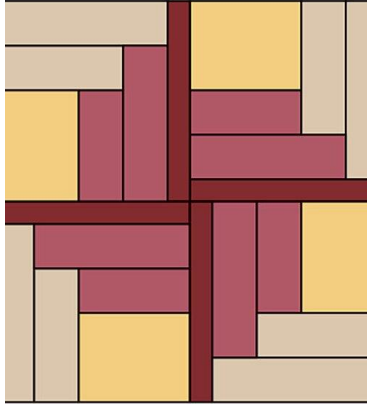

Block Assembly Diagram

Materials

- Gold print, red print, dark red print, and beige print scraps

Finished block: 9" square

Cut the Fabrics

From gold print, cut:

- 4-- $2\frac{1}{2} \times 3$ " rectangles
-

From red print, cut:

- 4-- $1\frac{1}{2} \times 4$ " rectangles
- 4-- $1\frac{1}{2} \times 3$ " rectangles

From dark red print, cut:

4-- 1×5 " rectangles

From beige print, cut:

- 4-- $1\frac{1}{2} \times 4\frac{1}{2}$ " rectangles
- 4-- $1\frac{1}{2} \times 3\frac{1}{2}$ " rectangles

Assemble the Block

1. Sew a red print $1\text{-}1/2 \times 3$ " rectangle to a long edge of a gold print $2\text{-}1/2 \times 3$ " rectangle (Diagram 1). Press the seam allowance toward the gold rectangle.




Diagram 1

2. Sew a beige print $1\text{-}1/2 \times 3\text{-}1/2$ " rectangle to the right edge of the pieced unit (Diagram 2). Press the seam allowance toward the gold rectangle.



Diagram 2

3. Sew a red print $1\text{-}1/2 \times 4$ " rectangle to the bottom edge of the pieced unit (Diagram 3). Press the seam allowance toward the gold rectangle.




Diagram 3

4. Sew a beige print $1\frac{1}{2} \times 4\frac{1}{2}$ " rectangle to the right edge of the pieced unit (Diagram 4). Press the seam allowance toward the gold rectangle.




Diagram 4

5. Sew a dark red print 1×5 " rectangle to the bottom edge of the pieced unit to complete a block unit (Diagram 5). Press the seam allowance toward the gold rectangle. The pieced block unit should measure 5" square, including the seam allowances.




Diagram 5

6. Repeat steps 1 through 5 to make a total of four block units.

7. Sew together block units in pairs (Block Assembly Diagram). Press the seam allowances in opposite directions. Then join the pairs to make a block. Press the seam allowance in one direction.

the seam allowance in one direction.

